




Z3
Technology®

Z3-DM8107-RPS

Rapid Production Starter Kit

The Z3-DM8107-RPS is a starter kit that allows multiple channel encode and decode of HD video. It consists of a hardware package and software bundle designed to enable rapid development of multimedia applications. The hardware consists of one Z3-DM8107-MOD-0x System on Module card, one Z3-DM8107-APP-0x Carrier Board and one Z3-DM8168-APP-0x Application (I/O) Board. The Z3-DM8107-MOD-0x is a compact OEM module which supports up to 1080p60 H.264 encode/decode in streaming or storage mode. It is especially suited for power-sensitive applications requiring a single video stream. The application board uses the I/O expansion capability of the Z3-DM8107-MOD-0x to implement additional functions not present in the base module. The software bundle consists of all the necessary components for developing advanced multimedia, graphics, and DSP applications.

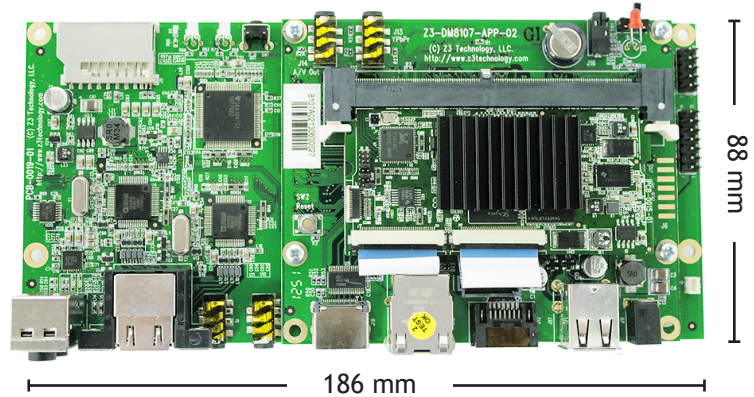

BENEFITS

- > Versatile encoding modes such as: low latency, low bitrate and high quality
- > Production-proven, fully integrated hardware and software audio/video system
- > Easily controlled through RS-232 or an HTTP-based GUI
- > Full A/V synchronization even after hours of recording
- > Ready to use, out-of-the-box commands for encoding, decoding and streaming

APPLICATIONS

- Broadcast Video
- Video Security and Surveillance
- Industrial Digital Video Recorders
- Medical Video
- Commercial and Educational Video
- Customized Applications*

***Contact Z3 Technology for Customized Product Options**

sales@Z3technology.com

+1.402.323.0702

www.Z3technology.com

Hardware

Module	Z3-DM8107-MOD-0x
Application Board	Z3-DM8107-APP-0x and Z3-DM8168-APP-0x
Processor	ARM Cortex A8
Video Inputs	2x HDMI, 2x Component and 2x Composite
Video Outputs	HDMI and Component
Video Codecs	H.264
Audio Interfaces	Analog Stereo and Embedded HDMI
Audio Codecs	AAC, G.711* and PCM*
Additional Interfaces	GigE, SD Card, SATA, 2x USB and Serial

Software


Software Development	Texas Instruments® RDK, Z3 Technology software components for RDK, Z3 Applications
Operating System	Linux 2.6 (root file-system, NAND boot, tool chain and flash programming tool), u-boot
Encoding Resolutions	H.264 video from QCIF to 1080p/i at 60 fps Dual Channel encode of up to 1x 1080i and 1x 720p60
Output Formats	RTP, MPEG-2 TS and TS File*
Decoding Resolutions	H.264 video from QCIF to 1080p/i at 60 fps
Input Formats	RTP, MPEG-2 TS and TS File*
Features	<ul style="list-style-type: none"> • Low latency mode • Flexible resizer to allow full frame display of smaller resolutions • Fully controllable parameters: resolution, max bitrate, GOP and on-the-fly bitrate control • File-based transcoder in H.264 and MPEG-2 available* • Source code license available*

Specifications


Module Size	82 x 43 mm (3.23 x 1.69 in)
Application Board Size	186 x 88 mm (7.32 x 3.46 in)
Power Supply	12V
Power Consumption	6W

HW Block Diagram

Z3-DM8107-RPS

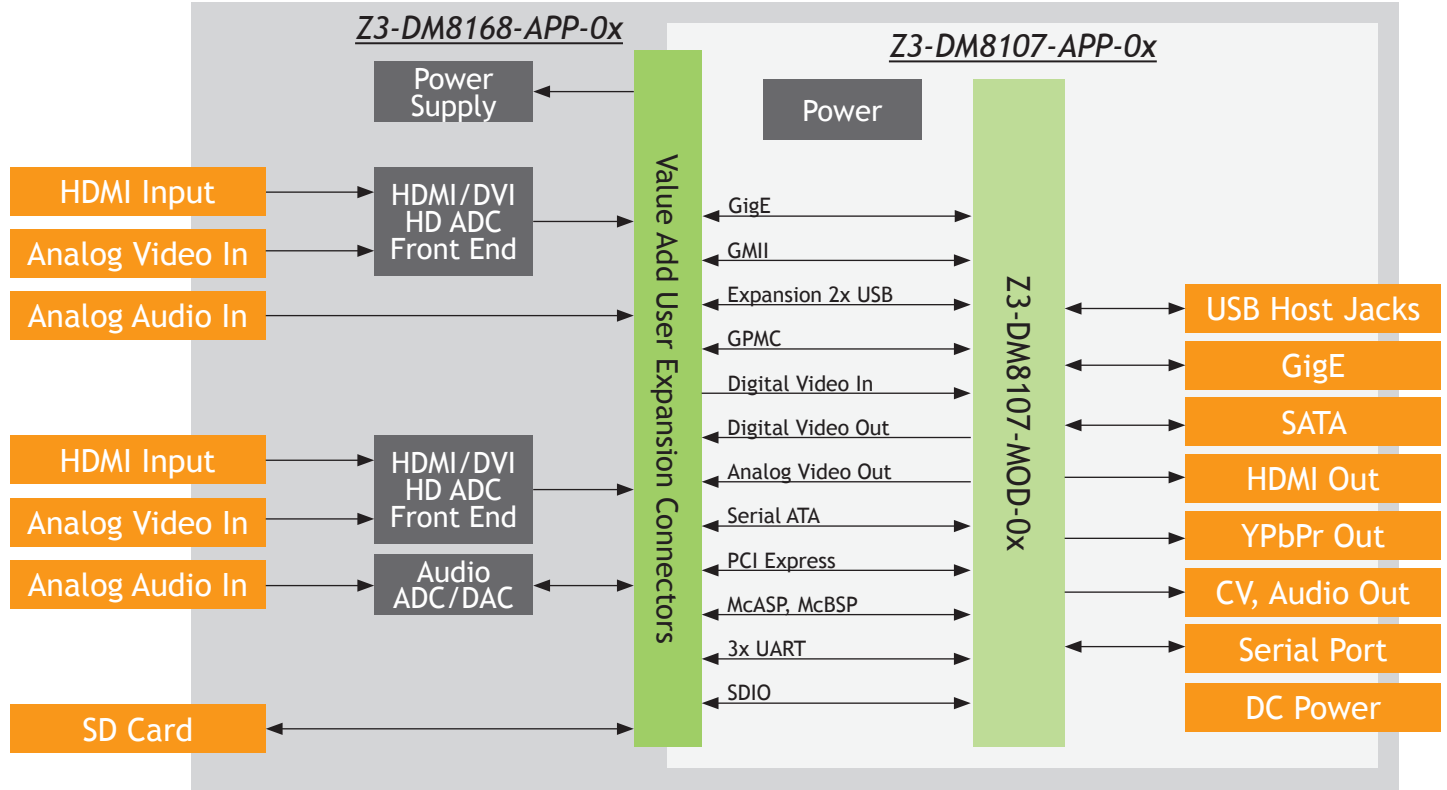

SW Block Diagram

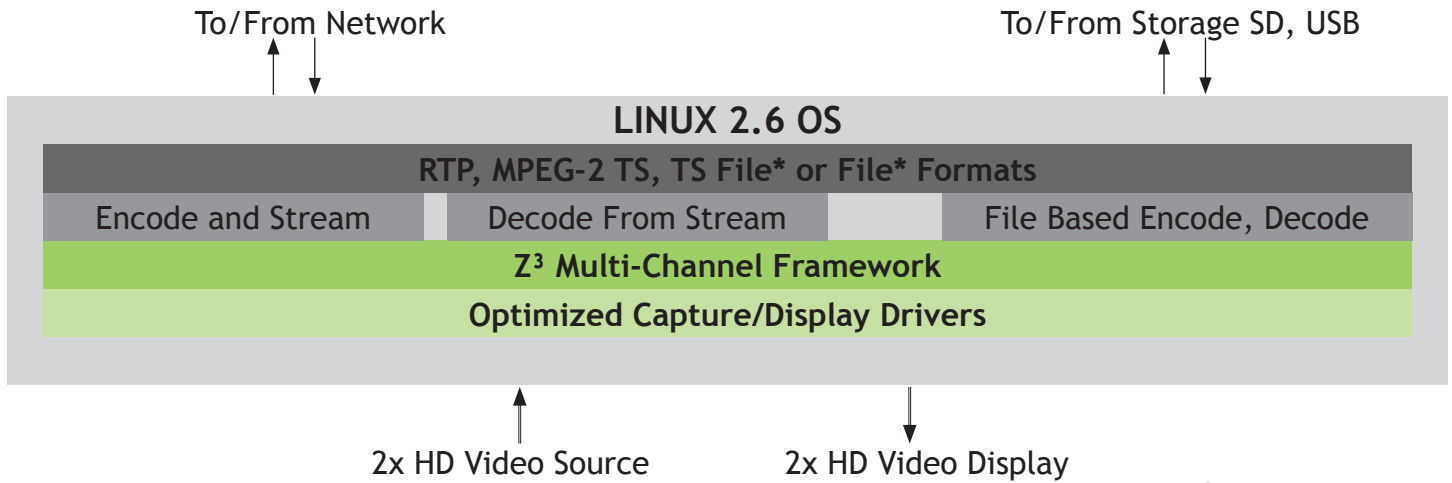

***Contact Z³ Technology for Customized Product Options**
sales@Z3technology.com +1.402.323.0702 www.Z3technology.com



Z³ Technology is the market leader in providing production-ready embedded multimedia solutions and systems. From our founders to our world-class engineers to our sales and customer service team, we understand your requirements and speak your language. Our experience allows us to provide cost-effective solutions to meet your multimedia product requirements. With the assistance of our robust worldwide distribution and sales networks, we can provide a simple solution for your multimedia needs.

