




**Z3**  
Technology®

# Z3-DM8169-4K-RPS

## Rapid Production Starter Kit

Stream One Source in 4K + 720p30

The Z3-DM8169-4K-RPS starter kit features Ultra HD video encode and decode. This system offers real-time 4K encoding and decoding capabilities while maintaining low power consumption. It is equipped with multi-resolution encode from a single source of up to 1x 4K + 1x 720p30. The Z3-DM8169-4K-RPS consists of a hardware package and software bundle designed to enable rapid development of multimedia applications. The hardware consists of one Z3-DM816x-MOD-4K System on Module card and one Z3-DM8169-APP-6x Application (I/O) Board. The software bundle consists of the necessary components for developing advanced multimedia, graphics, and DSP applications. This application board uses the I/O expansion capability of the Z3-DM816x-MOD-4K to implement additional functions not present in the base module.

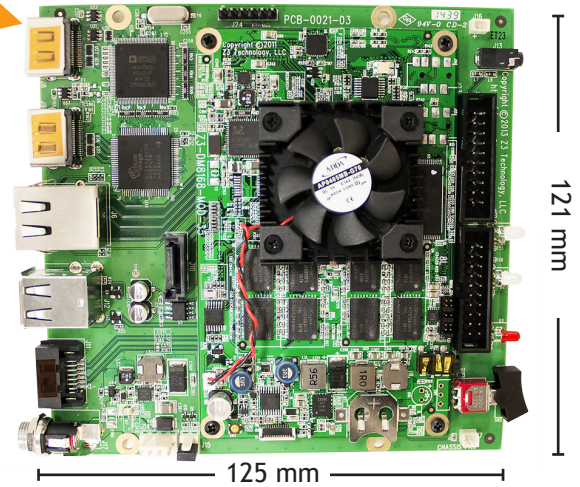

### BENEFITS

- > Stream One Source in 4K + 720p30 Resolutions
- > Production-proven, fully integrated hardware and software audio/video system
- > Easily controlled through RS-232 or an HTTP-based GUI
- > Full A/V synchronization even after hours of recording
- > Ready to use, out-of-the-box commands for encoding, decoding and streaming

### APPLICATIONS

- Medical Imaging Applications
- Digital Signage and Video Kiosks
- Video Security and Surveillance
- Industrial Video Solutions
- Military Applications
- Customized Applications\*

**\*Contact Z3 Technology for Customized Product Options**

[sales@Z3technology.com](mailto:sales@Z3technology.com)

+1.402.323.0702

[www.Z3technology.com](http://www.Z3technology.com)

### Hardware

Module	Z3-DM816x-MOD-4K
Application Board	Z3-DM8169-APP-6x
Processor	DSP + ARM Cortex A8
Video Inputs	HDMI
Video Outputs	HDMI
Video Codecs	H.264
Audio Interfaces	Embedded HDMI
Audio Codecs	AAC, G.711* and PCM*
Additional Interfaces	GigE, 2x SATA2, 2x USB 2.0 and Serial

### Software


Software Development	Texas Instruments® RDK, Z3 Technology software components for RDK, Z3 Applications
Operating System	Linux 2.6 (root file-system, NAND boot, tool chain and flash programming tool), u-boot
Encoding Resolutions	H.264 video from QCIF to 2160p30 (4K) Simultaneous encode of one source in 4K + 720p30
Output Formats	RTP, MPEG-2 TS and TS File
Decoding Resolutions	H.264 video from QCIF to 2160p30 (4K)
Input Formats	RTP, MPEG-2 TS and TS File
Features	<ul style="list-style-type: none"> <li>• Stream One Source in Multiple Resolutions (1x 4K + 1x 720p30)</li> <li>• Low latency mode</li> <li>• Fully controllable parameters: resolution, max bitrate and GOP</li> <li>• Source code license available*</li> </ul>

### Specifications


Module Size	108 x 68 mm (4.25 x 2.67 in)
Application Board Size	125 x 121 mm (4.92 x 4.76 in)
Power Supply	12V
Power Consumption	14W
Ordering Information	Z3-4K-RPS-SW-01 (4Kp30 Encoder or 4Kp30 Decoder) Z3-4K-RPS-SW-02 (4Kp30 + 720p30 Encode Only)

# HW Block Diagram

# Z3-DM8169-4K-RPS

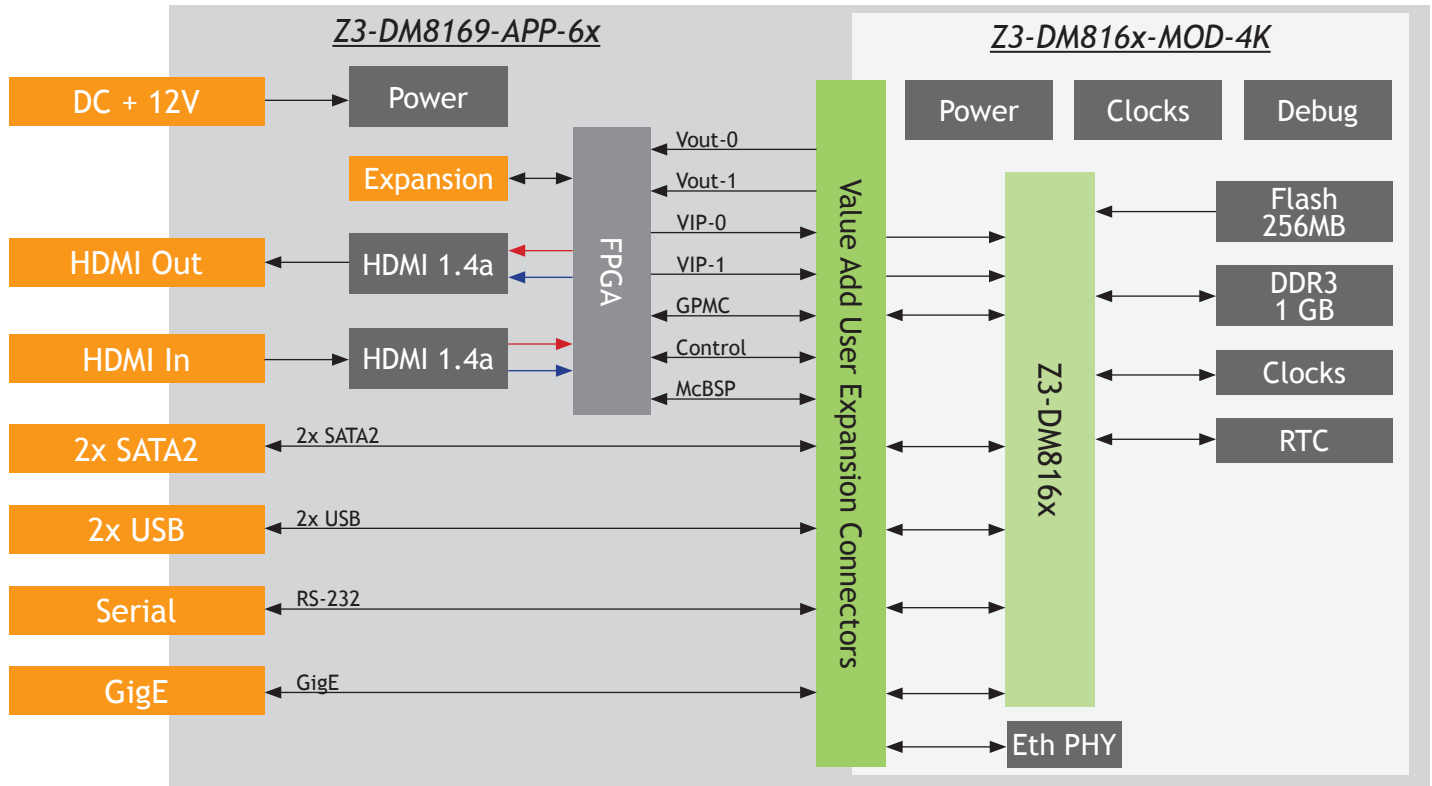

# SW Block Diagram

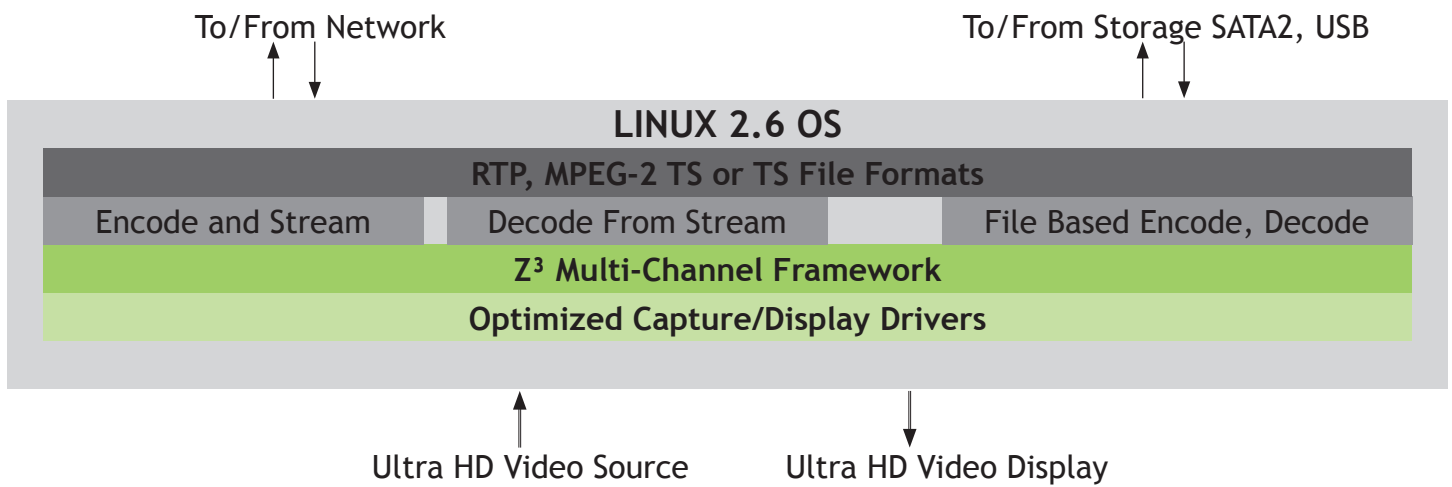

**\*Contact Z<sup>3</sup> Technology for Customized Product Options**  
[sales@Z3technology.com](mailto:sales@Z3technology.com)    +1.402.323.0702    [www.Z3technology.com](http://www.Z3technology.com)



Z<sup>3</sup> Technology is the market leader in providing production-ready embedded multimedia solutions and systems. From our founders to our world-class engineers to our sales and customer service team, we understand your requirements and speak your language. Our experience allows us to provide cost-effective solutions to meet your multimedia product requirements. With the assistance of our robust worldwide distribution and sales networks, we can provide a simple solution for your multimedia needs.