




Z3
Technology®

Z3-DM368-SDI-RPS

Rapid Production Starter Kit

The Z3-DM368-SDI-RPS development system provides the hardware and software needed to quickly handle SDI and ASI video. Measuring only 68 x 44 mm, the Z3-DM368-MOD is the most compact production-ready DM368 based video encoder/decoder system-on-module on the market. The Z3-DM368-SDI-RPS supports real-time high definition video input and analog audio input. The hardware provided includes one Z3-DM368-MOD System on Module card and one Z3-DM368-APP-1x Application (I/O) Board, which provides advanced video input and output capabilities. The bundled software includes all necessary components for the user to develop their own advanced multimedia, graphics and DSP applications.

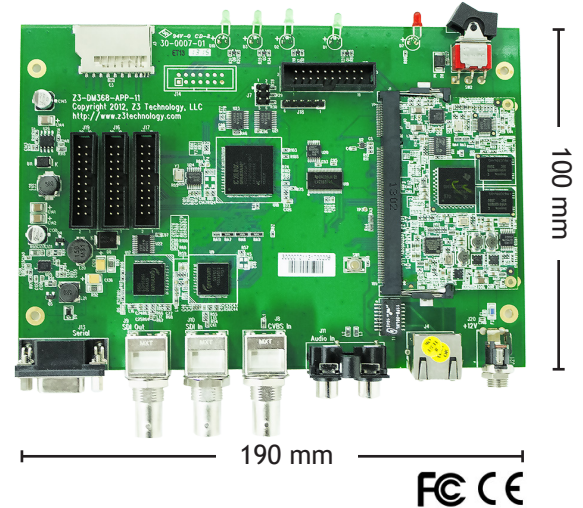

BENEFITS

- > Versatile encoding modes such as: low latency, low bitrate and high quality
- > Production-proven, fully integrated hardware and software audio/video system
- > Easily controlled through RS-232 or an HTTP-based GUI
- > Full A/V synchronization even after hours of recording
- > Ready to use, out-of-the-box commands for encoding, decoding and streaming

APPLICATIONS

- Broadcast Video
- Video Security and Industrial Video
- Digital Signage and Video Kiosks
- Medical Video
- Commercial and Educational Video
- Customized Applications*

***Contact Z3 Technology for Customized Product Options**

sales@Z3technology.com

+1.402.323.0702

www.Z3technology.com

Hardware

Module	Z3-DM368-MOD-0x
Application Board	Z3-DM368-APP-1x
Processor	ARM9
Video Inputs	HD-SDI, Composite and ASI
Video Outputs	ASI and HD-SDI
Video Codecs	H.264 and MPEG-2
Audio Interfaces	Analog Stereo
Audio Codecs	AAC, G.711 and PCM
Additional Interfaces	Ethernet, SD Card and Serial


Software

Software Development	Texas Instruments® DVSDK, Z3 Technology software components for DVSDK, Z3 Applications
Operating System	Linux 2.6 (root file-system, NAND boot, tool chain and flash programming tool), u-boot
Encoding Resolutions	H.264 video from QCIF to 1080p/i at 30 fps
Output Formats	RTP, MPEG-2 TS, RTMP and MPEG-2 TS over RTP
Decoding Resolutions	H.264 video from QCIF to 1080p/i at 30 fps if encoder is DM368 based, otherwise max of 720p30
Input Formats	RTP, RTSP, MPEG-2 TS and MPEG-2 TS over RTP <ul style="list-style-type: none"> • Closed Captioning (EIA-608, EIA-708) • Low latency mode
Features	<ul style="list-style-type: none"> • Flexible resizer to allow full frame display of smaller resolutions • Fully controllable parameters: resolution, max bitrate, GOP size and on-the-fly bitrate control • Source code license available*


Specifications

Module Size	68 x 44 mm (2.68 x 1.73 in)
Application Board Size	190 x 100 mm (7.48 x 3.94 in)
Power Supply	12V
Power Consumption	2.6W

HW Block Diagram

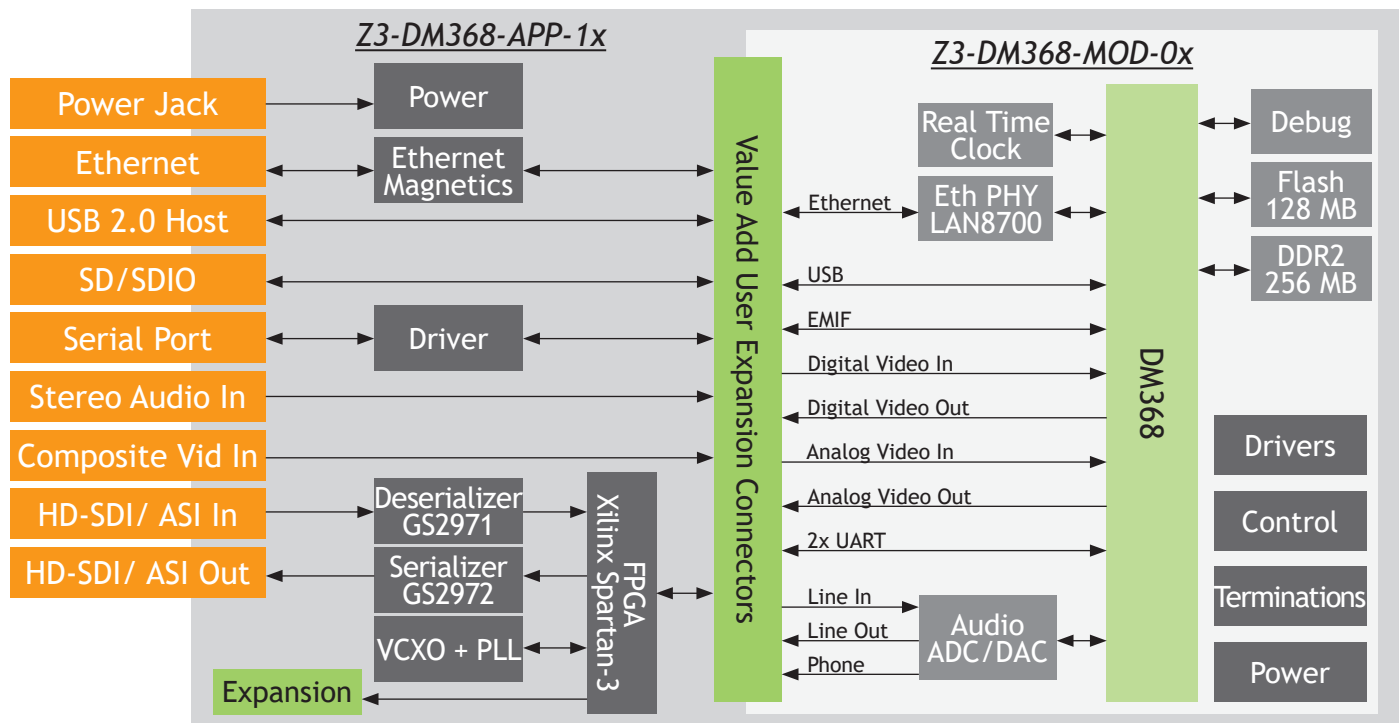

SW Block Diagram

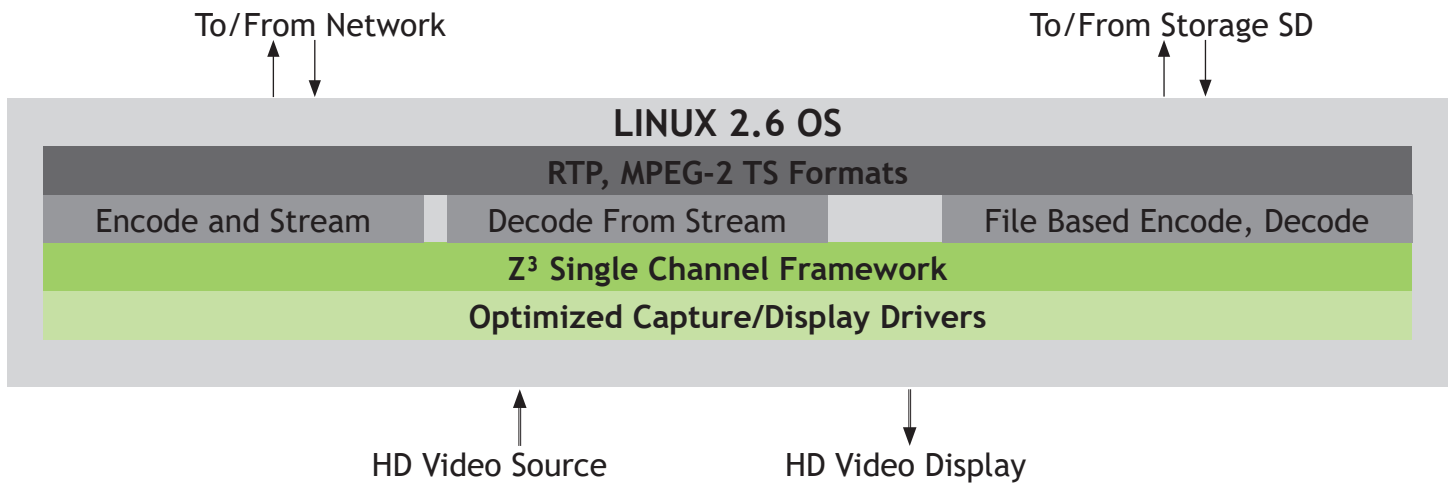

***Contact Z³ Technology for Customized Product Options**
sales@Z3technology.com +1.402.323.0702 www.Z3technology.com



Z³ Technology is the market leader in providing production-ready embedded multimedia solutions and systems. From our founders to our world-class engineers to our sales and customer service team, we understand your requirements and speak your language. Our experience allows us to provide cost-effective solutions to meet your multimedia product requirements. With the assistance of our robust worldwide distribution and sales networks, we can provide a simple solution for your multimedia needs.